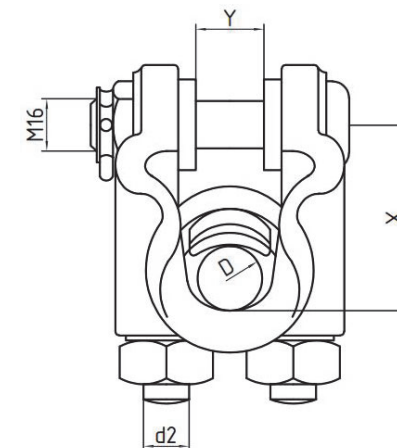
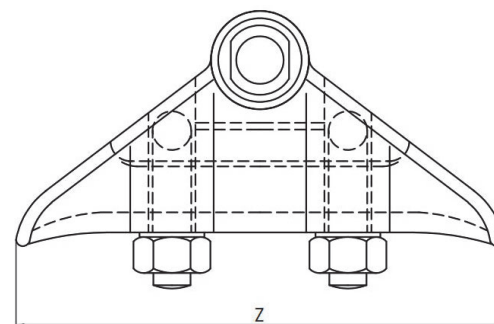


CROATIAN


NOSIVE STEZALJKE ZA OVJEŠENJE VODIČA

- Proizvod:** Nosiva stezaljka za prihvat Al/Če užeta raznih promjera
- Materijal:** Aluminijska legura, čelik
- Tijelo:** - aluminijska legura
- Svornjaci i vijci:** - vruće pocinčani
- Standard:** Ispitano po standardu EN ISO 61284, EN ISO 13018, EN ISO 1461


ENGLISH

Suspension Clamps for Conductor Hanging

- Product:** Suspension clamp for holding Al/Fe conductors of various diameters
- Material:** Aluminijska legura, čelik
- Body:** - Aluminum alloy
- Bolts and pins:** - Hot-dip galvanized steel
- Standard:** Tested according to EN ISO 61284, EN ISO 13018, EN ISO 1461

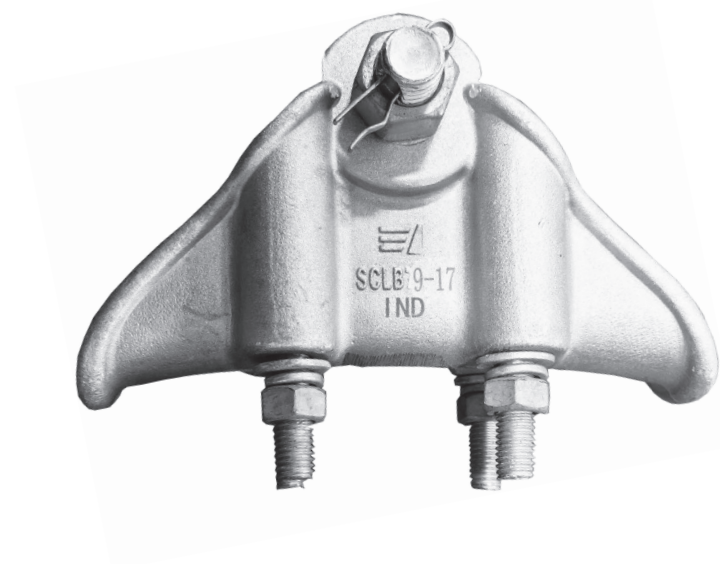

Tip Type	Dimenzije (mm) Dimensions (mm)				Promjer Al/Če užeta (mm) Diameter of Al/Fe conductor (mm)	Min. prijelomna sila (kN) Min. breaking load (kN)	Masa (kg) Mass (kg)
	X	Y	d2	Z			
SCLB 7-15	60	24	10	170	7-15	60	0.87
SCLB 9-17	60	24	10	170	9-17	60	0.95
SCLB 14-20	60	24	12	190	14-20	80	1.2


CROATIAN

NOSIVE STEZALJKE ZA OVJEŠENJE VODIČA SA ŠKOPCEM TIP SCLBS

Nosiva stezaljka sa škopcem (dva vijka M10) za prihvat Al/Če užeta raznih promjera

Materijal: Tijelo i klin aluminijska legura
Ostali metalni dijelovi- kovani čelik, čelik vruće pocinčan

Standard: Ispitano po standardu EN ISO 61284, EN ISO 13018, EN ISO 1461

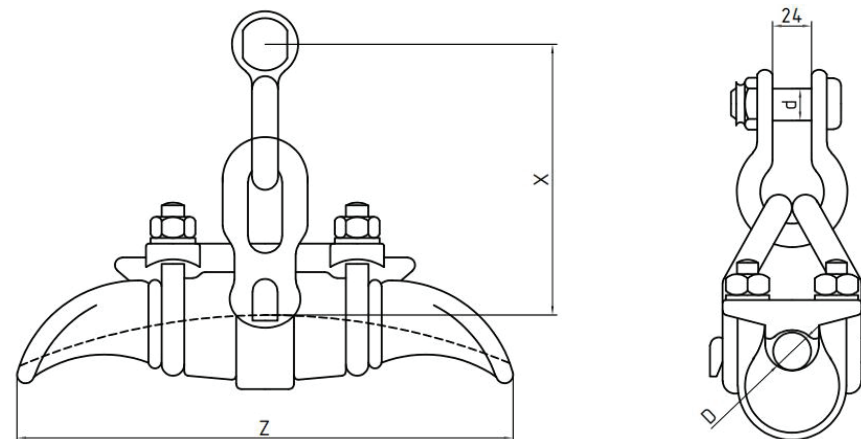
ENGLISH

Load-Bearing Clamps for Conductor Suspension with Shackle, Type SCLBS

Load-bearing clamp with shackle (two M10 bolts) for connecting Al/Fe stranded conductors of various diameters.

Material: Body and wedge aluminum alloy
Other metal parts- forged steel, hot-dip galvanized steel

Standard: Tested according to EN ISO 61284, EN ISO 13018, EN ISO 1461




Tip Type	Dimenzije (mm) Dimensions (mm)			Promjer Al/Če užeta D Diameter of Al/Fe conductor	Min. prijelomna sila (kN) Min. breaking load (kN)	Masa (kg) Mass (kg)
	X	d	Z			
SCLBS 11-17	110	16	210	11-17	80	1.6
SCLBS 14-20	110	16	240	14-20	80	2.0

CROATIAN

NOSIVE STEZALJKE ZA OVJEŠENJE VODIČA SA ŠKOPCEM TIP SCLBS 90°


- Proizvod:** Nosiva stezaljka sa škopcem 90° (dva vijka M 10), za prihvat Al/Če užeta presjeka 120/20-185/30 mm2
- Materijal:** Klin i tijelo aluminijska legura, ostalo čelik kovani, čelik vruće pocinčan
- Standard:** Ispitano po standardu EN ISO 61284, EN ISO 13018, EN ISO 1461

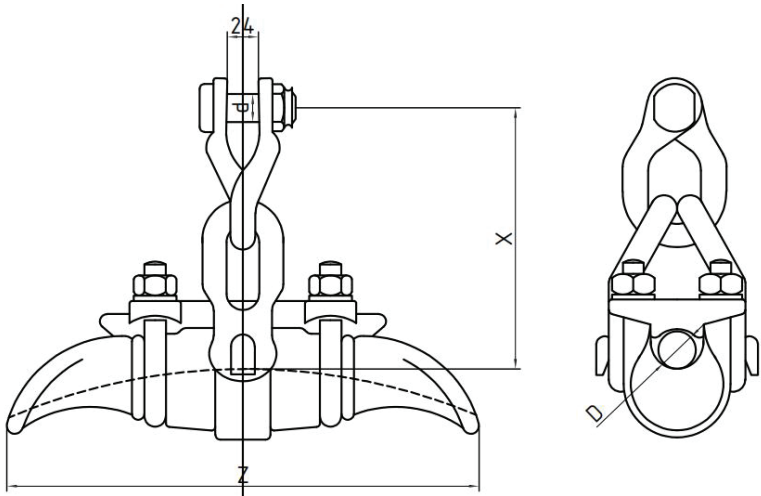

ENGLISH

Suspension Clamp with a Shackle 90° Type SCLBS

- Product:** Suspension clamp with a shackle 90° (two bolts M 10), for holding of Al/Fe conductor with various diameters
- Material:** Wedge and body: aluminium alloy, other parts: forged steel, hot-dip galvanized steel
- Standard:** Tested according EN ISO 61284, EN ISO 13018, EN ISO 1461

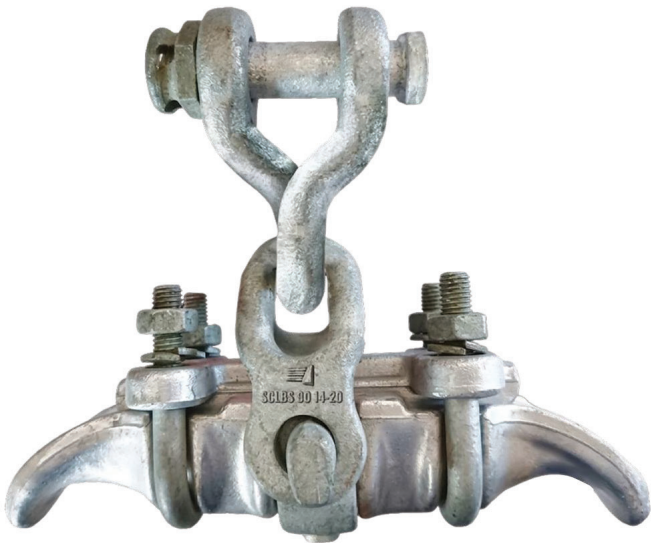

Tip Type	Dimenzije (mm) Dimensions (mm)			Promjer Al/Če užeta D (mm) Diameter of Al/Fe conductor (mm)	Min. prijelomna sila (kN) Min. breaking load (kN)	Masa (kg) Mass (kg)
	X	d	Z			
SCLBS 90 14-20	150	16	240	14-20	80	2.35

CROATIAN


STEZALJKA NOSIVA GIBLJIVA

Primjena: Koristi se za zatezno ili nosivo ovješnje Al/Fe užeta

Materijal:

Tijelo - aluminijska legura; vijci i matice: čelik vruće pocinčan

Standard: Ispitano po standardu: EN ISO 61284, EN ISO 13018, EN ISO 1461

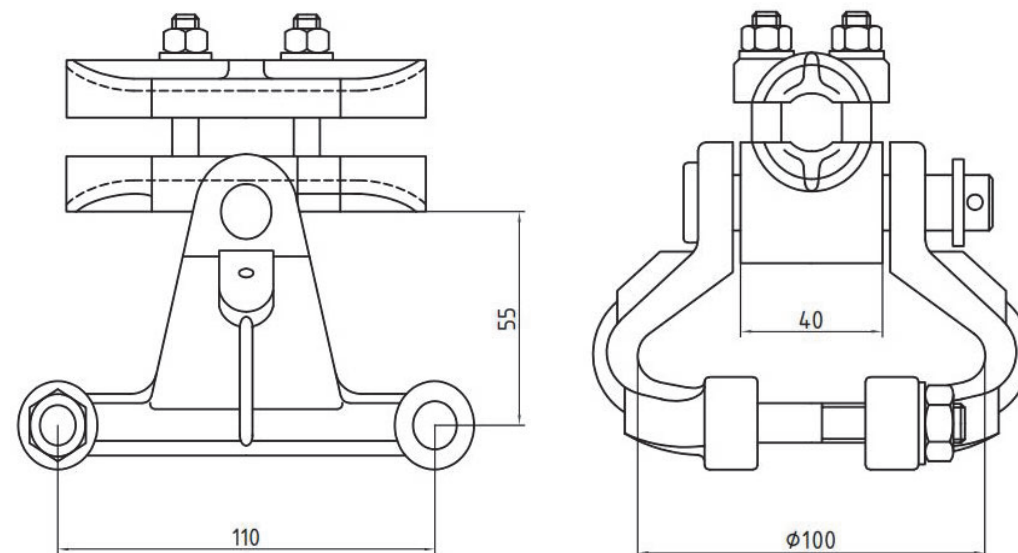

ENGLISH


Flexible Support Clamp

Application: Used for tensioning or supporting suspension of Al/Fe ropes

Material:

Body - aluminum alloy; bolts and nuts: hot-dip galvanized steel

Standard: Tested according to the standard: EN ISO 61284, EN ISO 13018, EN ISO 1461

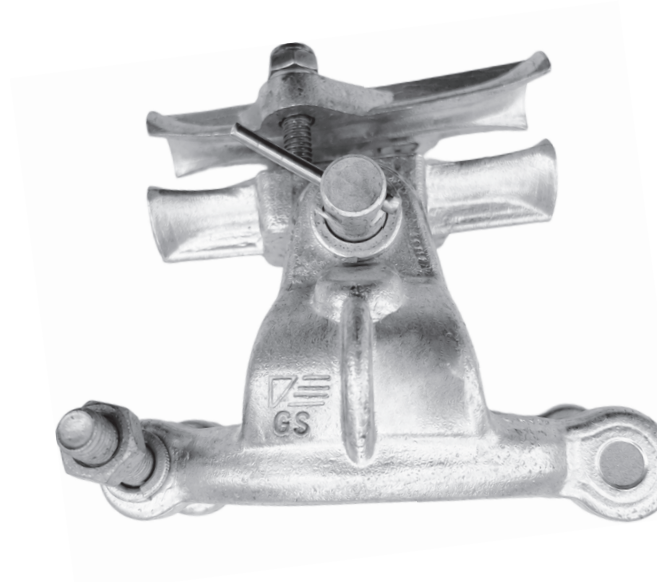

Tip Type	L	Dimenzije (mm) Dimensions (mm)			Promjer Al/Fe užeta mm ² Al/Fe rope diameter mm ²	Masa (kg) Mass (kg)
		X	d	Ø		
GS	110	55	40	100	50/8 - 120/20	0.79

CROATIAN


NOSIVA STEZALJKA ZA OVJEŠANJE UTEGA

Primjena: Koristi se za ovješanje utega i Al/Fe vodiče raznih promjera

Materijal:

Tijelo i klin - aluminijska legura; vijci, stremen, škopac: vruće pocinčan

Standard: Ispitano po standardu EN ISO 61284, EN ISO 13018, EN ISO 1461

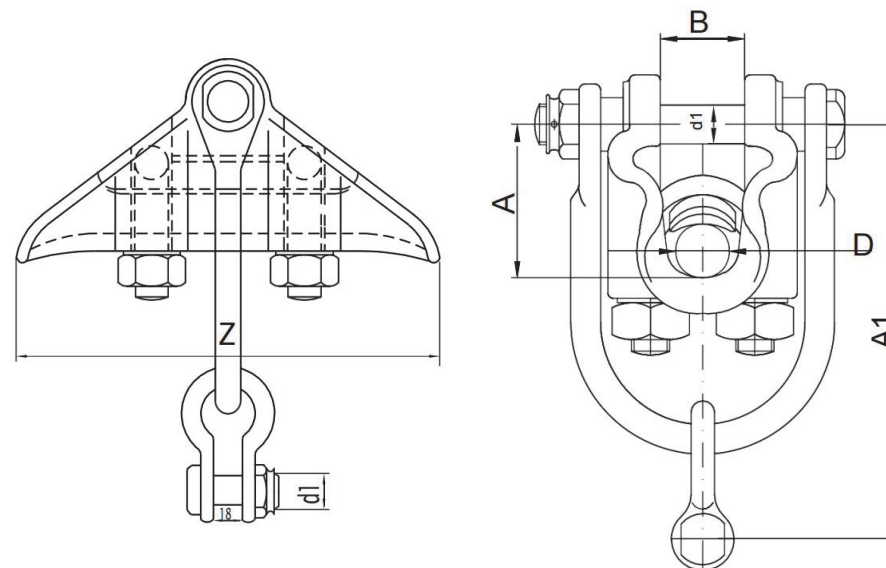

ENGLISH

Load-Bearing Clamp for Suspending Weights

Application: Used for hanging weights and Al/Fe conductors of various diameters

Material:

Body and pin: - aluminum alloy; screws, stirrup, shackle: hot-dip

Standard: Tested according to EN ISO 61284, EN ISO 13018, EN ISO 1461



Tip Type	Dimenzije (mm)	Dimensions (mm)	Presjek vodiča(D)	Al/Fe vodič Ømm	Min. prekidna sila kN	Masa (kg)	A	A1	B
	Z	d1	Cross-section conductor (D)	Al/Fe conductor Ømm	Min. breaking force kN	Mass (kg)			
SNUK 50-120	170	16	50/8 -120/20	9-17	60	2.35	60	180	24
SNUK 120-185	180	16	120/20 -185/30	14-20	80	2.90	60	180	24

CROATIAN


NOSIVA STEZALJKA ZA OVJEŠANJE UTEGA

Primjena: Koriste se za ovješanje utega i Al/Fe vodiče raznih promjera

Materijal:

Tijelo i klin - aluminijska legura, ostalo vruće pocinčano

Standard: Ispitano po standardu EN ISO 61284, EN ISO 1461

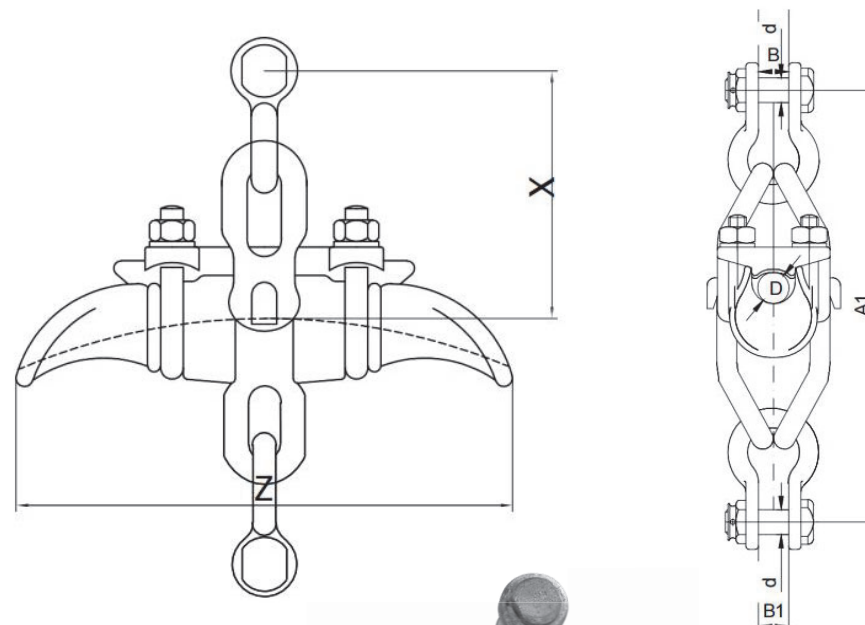

ENGLISH

Suspension Clamp for Counterweight Attachment

Application: Used for suspending weights and Al/Fe conductors of various diameters.

Material:

Body and pin: - made of aluminium alloy; other parts hot-dip galvanized.

Standard: Tested according to EN ISO 61284 and EN ISO 1461 standards.



Tip Type	Dimenzije (mm) Dimensions (mm)		Presjek vodiča(D) Cross-section conductor (D)	Al/Fe vodič Ømm Al/Fe conductor Ømm	X	B	B1	d	Struja kratkog spoja (kA) Current Short Circuit (kA)	Min. prekidna sila kN Min. breaking force kN	Masa (kg) Mass (kg)
	A1	Z									
SNU 70-120	265	210	70/12 -120/20	11-17	110	24	18	16	20	80	2.25


CROATIAN

NOSIVA STEZALJKA

Primjena: Koriste se za ovješanje čeličnog zaštitnog užeta na stup

Materijal: Čelik klase S235JR, vruće pocinčan

Standard: Ispitano po standardu: EN ISO 1461, EN ISO 61284, EN ISO 13018

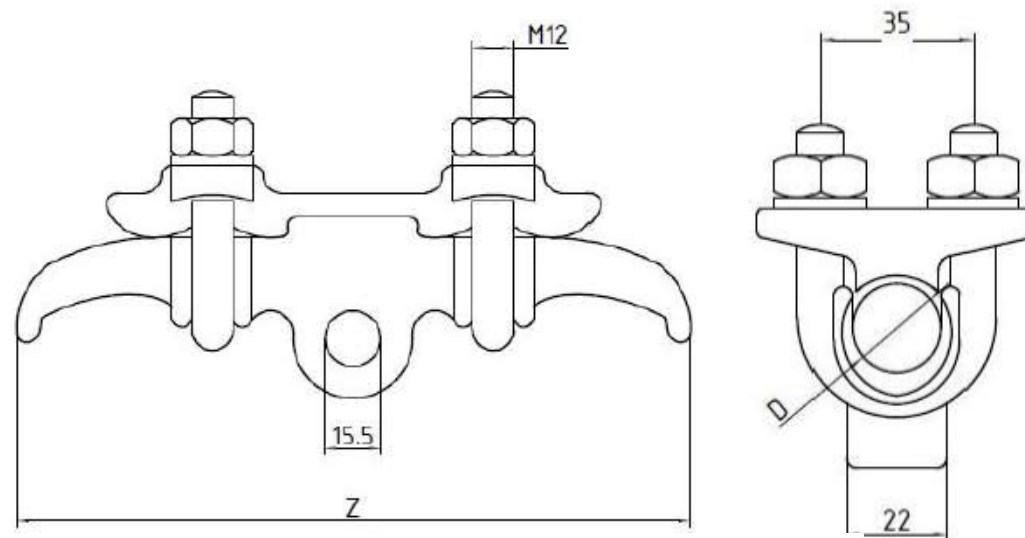

ENGLISH

Suspension Clamps

Product: A suspension clamp for steel wire pole suspension

Materijal: Steel class S235JR

Standard: In accordance with standards EN ISO 61284, EN ISO 13018, EN ISO 1461

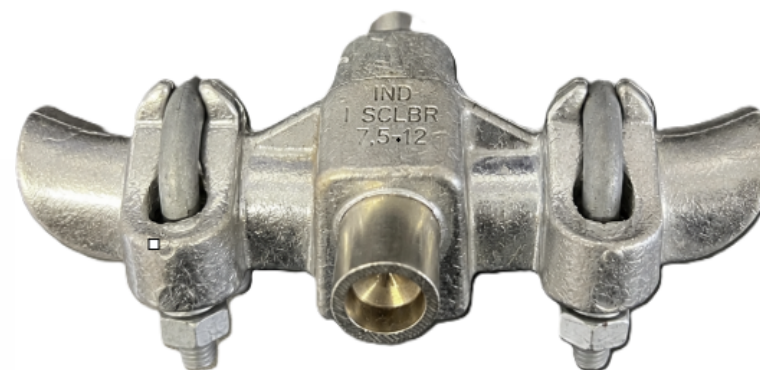

Tip Type	Promjer Užeta Conductor Diameter	Presjek užeta mm ² Wire cross section mm ²	Min. prekidna sila kN Min. Breaking Load kN	Dužina stezaljke Clamp length Z	Masa (kg) Mass (kg)
SCLBR 7.5-12	7.5 -12	35-70	80	170 mm	1.05
SCLBR 9-15	9-15	50-120	80	225 mm	1.53