


CROATIAN

ZASTAVICA S VILICOM

Primjena: Zastavice s vilicom koriste se za zatežno ili nosivo ovješanje izolatorskog lanca. Isporučuje se sa oba svornjaka

Materijal: Čelik vruće pocinčan

Standard: Ispitano po standardu: EN ISO 1461, EN ISO 61284, EN ISO 13018

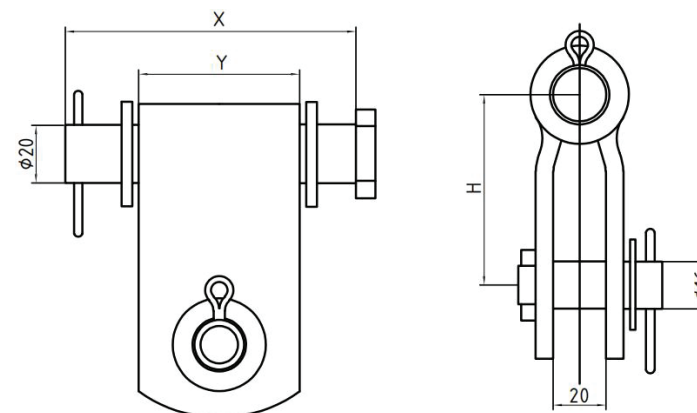


ENGLISH

Hinge With Clevis

Application: Hinges with clevis are used for tension or load-bearing suspension of the insulator string. Supplied with both pins.

Material: Hot-dip gavanized steel.

Standard: Tested according standard: EN ISO 1461, EN ISO 61284, EN ISO 13018

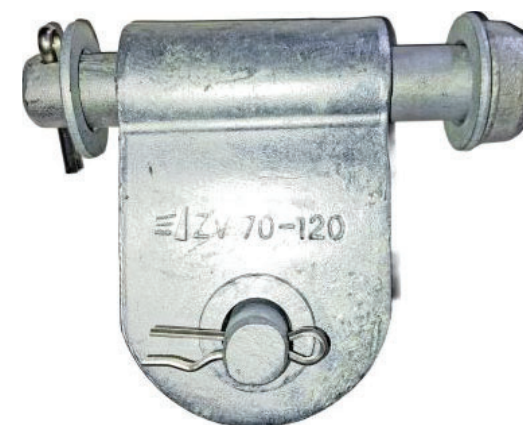

Tip Type	Dimenzije (mm) Dimensions (mm)			Min. prekidna sila (kN) Min. Breaking load (kN)	Masa (kg) Mass (kg)
	X	Y	Z		
ZV 55-70	100	55	65	70	1.28
ZV 70-120	120	70	65	120	1.85

CROATIAN

ZASTAVICE S OČKOM

Primjena: Zastavice s očkom koriste se za zatežno ili nosivo ovješnje izolatorskog lanca. Stavka obuhvaća i isporuku svornjaka.

Materijal: Čelik vruće cinčani

Standard: Ispitano po standardu: EN ISO 1461, EN ISO 61284, EN ISO 13018


ENGLISH

Hinge With Tongue

Application: Hinges with tongue are used for tension or load-bearing suspension of the insulator string. The item includes the supply of the pin.

Material: Hot-dip galvanized steel.

Standard: Tested according to: EN ISO 1461, EN ISO 61284, EN ISO 13018

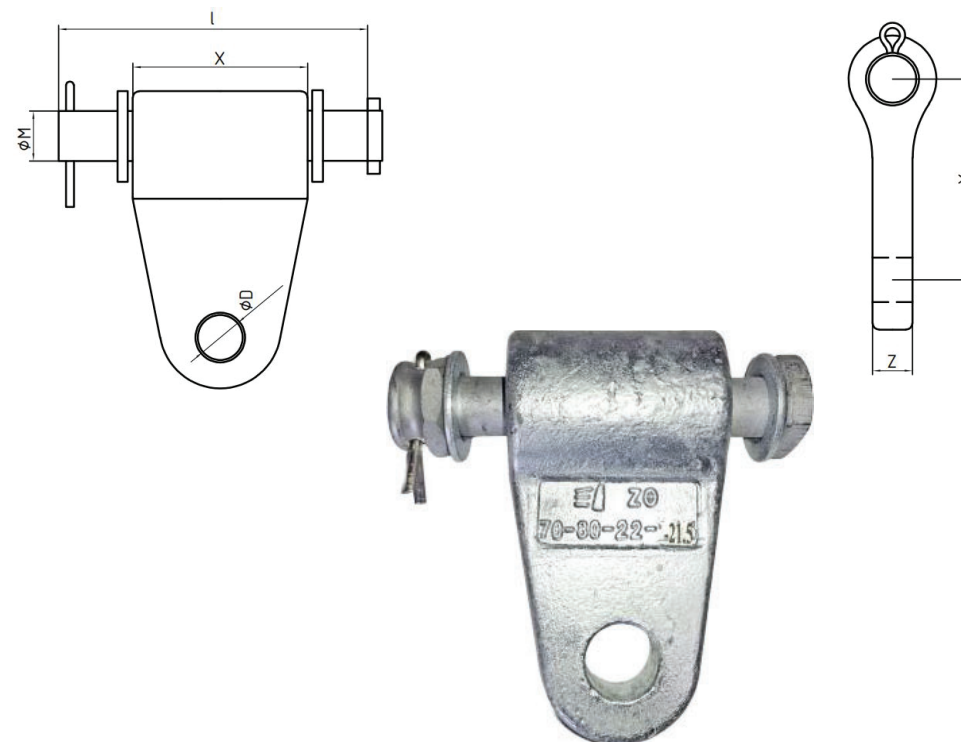

Tip Type	Dimenzije (mm) Dimensions (mm)				Min. prekidna sila (kN) Min. Breaking load (kN)		Masa (kg) Mass (kg)
	L	X	Y	Z	Otvor očke (ØD) Tongue hole (ØD)	ØM	
ZO 55-75-16-17,5	100	55	75	16	17,5	20	1.13
ZO 55-75-22-21,5	105	55	75	22	21,5	20	0.92
ZO 55-75-22-17,5	105	55	75	22	17,5	20	0.95
ZO 70-80-16-17,5	120	70	80	16	17,5	20	1.32
ZO 70-80-22-21,5	120	70	80	22	21,5	20	1.88
ZO 70-85-16-17,5	120	70	85	16	17,5	20	1.30
ZO 70-85-22-17,5	120	70	85	22	17,5	20	1.90
ZO 110-80-22-23,5	175	110	80	22	23,5	24	2.90