


**CROATIAN**

## ZDJELICA S OČKOM

**Primjena:** Zdjelica s očkom koristi se za ovješanje izolatorskog lanca.

**Materijal:** Čelik vruće cinčan

**Standard:** Ispitano po standardu: EN ISO 1461, EN ISO 61284, EN ISO 13018

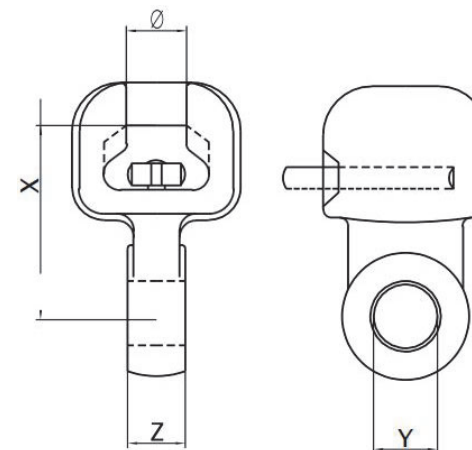
**ENGLISH**

## Socket Tongues

**Application:** Socket tongues is used for suspension of the insulator chain.

**Material:** Steel HDG

**Standard:** Tested according to standard: EN ISO 1461, EN ISO 61284, EN ISO 13018



| Tip<br>Type   | Dimenzije (mm)    Dimensions (mm) |      |    |      | Klasa IEC<br>IEC Class | Min. prekidna sila (kN)<br>Min. Breaking load (kN) | Masa (kg)<br>Mass (kg) |
|---------------|-----------------------------------|------|----|------|------------------------|----------------------------------------------------|------------------------|
|               | X                                 | Y    | Z  | Ø    |                        |                                                    |                        |
| ZO 110-18-20  | 110                               | 18   | 20 | 12.5 | 11                     | 50                                                 | 0.70                   |
| ZO 58-17,5-22 | 58                                | 17.5 | 22 | 19.2 | 16                     | 80                                                 | 0.50                   |
| ZO 58-17,5-19 | 58                                | 17.5 | 19 | 19.2 | 16                     | 80                                                 | 0.50                   |
| ZO 61-17,5-22 | 61                                | 17.5 | 22 | 19.2 | 16                     | 120                                                | 0.80                   |
| ZO 61-21,5-22 | 61                                | 21.5 | 22 | 19.2 | 16                     | 120                                                | 0.80                   |

## CROATIAN

**ZDJELICA S OČKOM I DODATNIM OTVOROM**

**Primjena:** Zdjelica s očkom i dodatnim otvorom koristi se za ovješnje izolatorskog lanca i za prihvat zaštitnog roga.

**Materijal:** Čelik vruće cinčan

**Standard:** Ispitano po standardu: EN ISO 1461, EN ISO 61284, EN ISO 13018


## ENGLISH

**Socket Tongues**

**Application:** Socket tongues is used for suspension of insulator chain and protective horn holder.

**Material:** Steel HDG

**Standard:** Tested according to standard: EN ISO 1461, EN ISO 61284, EN ISO 13018

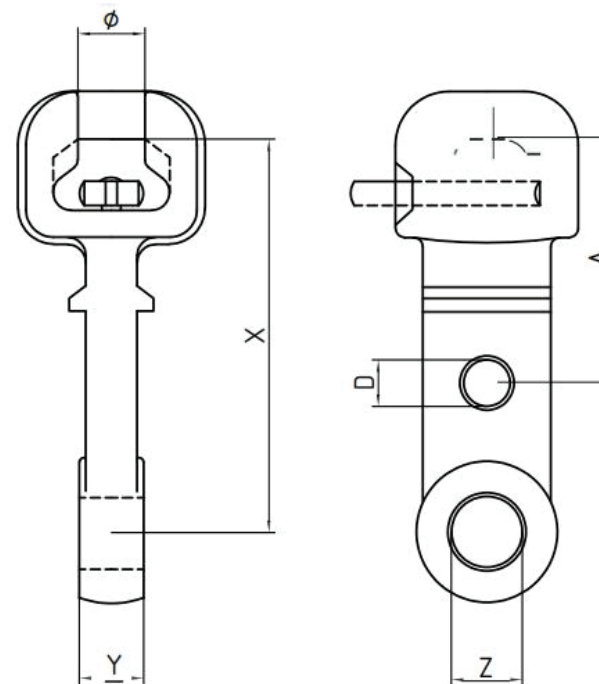

| Tip<br>Type | Dimenzije (mm)    Dimensions (mm) |    |    |      |      |      | Klasa IEC<br>IEC Class | Min. prekidna sila (kN)<br>Min. Breaking load (kN) | Masa (kg)<br>Mass (kg) |
|-------------|-----------------------------------|----|----|------|------|------|------------------------|----------------------------------------------------|------------------------|
|             | X                                 | Y  | A  | Z    | Ø    | D    |                        |                                                    |                        |
| ZOD 13-5    | 117.5                             | 22 | 67 | 21.5 | 19.2 | 13.5 | 16                     | 120                                                | 1.05                   |
| ZOD 17-5    | 116                               | 22 | 60 | 17.5 | 19.2 | 13.5 | 16                     | 120                                                | 1.05                   |

CROATIAN

## ZDJELICA S OČKOM I DODATNIM OTVOROM

**Primjena:** Zdjelica s očkom i dodatna dva otvora koristi se za ovješnje izolatorskog lanca i za prihvata zaštitnog roga.

**Materijal:** Čelik vruće cinač

**Standard:** Ispitano po standardu: EN ISO 1461, EN ISO 61284, EN ISO 13018


ENGLISH

## Socket Tongues

**Application:** Socket tongues with two additional openings is used for suspension of the insulator chain and protective horn holder.

**Material:** Steel HDG

**Standard:** Tested according to standard: EN ISO 1461, EN ISO 61284, EN ISO 13018

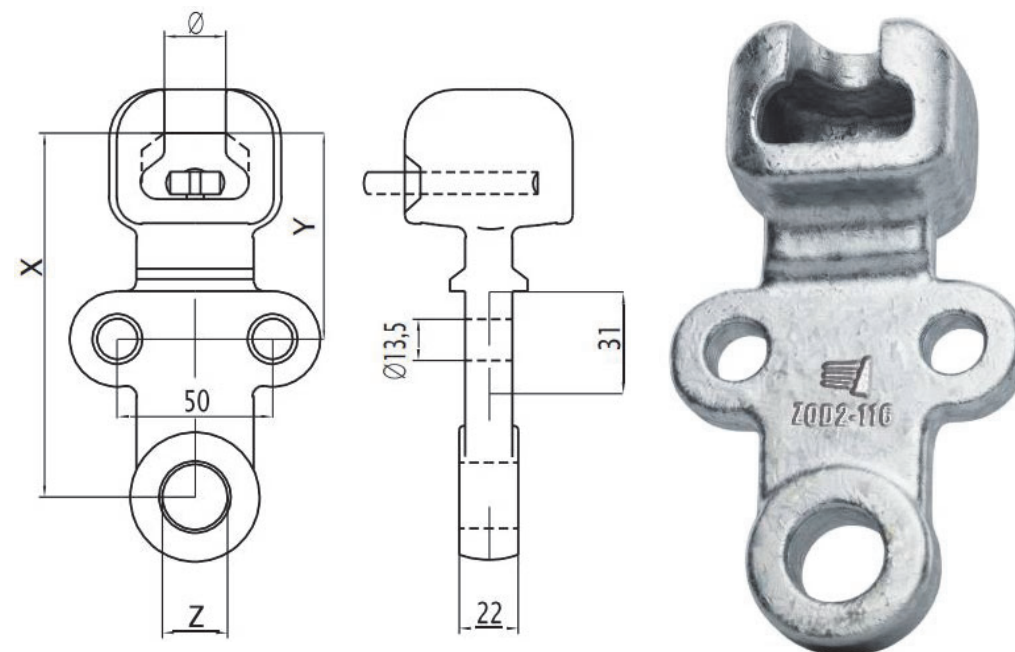

| Tip<br>Type | Dimenzije (mm)    Dimensions (mm) |    |      |      | Klasa IEC<br>IEC Class | Min. prekidna sila (kN)<br>Min. Breaking load (kN) | Masa (kg)<br>Mass (kg) |
|-------------|-----------------------------------|----|------|------|------------------------|----------------------------------------------------|------------------------|
|             | X                                 | Y  | Z    | Ø    |                        |                                                    |                        |
| ZOD2-116    | 116                               | 66 | 17.5 | 19.2 | 16                     | 120                                                | 1.00                   |
| ZOD2-118    | 118                               | 68 | 21.5 | 23   | 20                     | 160                                                | 1.45                   |

CROATIAN



ZDJELICA S VILICOM

- Primjena:** Koristi se za ovješanje izolatorskog lanca
- Materijal:** Čelik vruće cínčan
- Standard:** Ispitano po standardu: EN ISO 1461, EN ISO 61284, EN ISO 13018

ENGLISH

Socket Clevises

- Application:** Used for suspending insulator chain.
- Material:** Steel HDG
- Standard:** Tested according to standard: EN ISO 1461, EN ISO 61284, EN ISO 13018

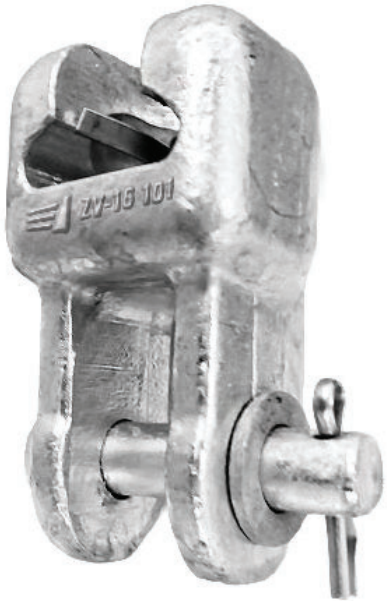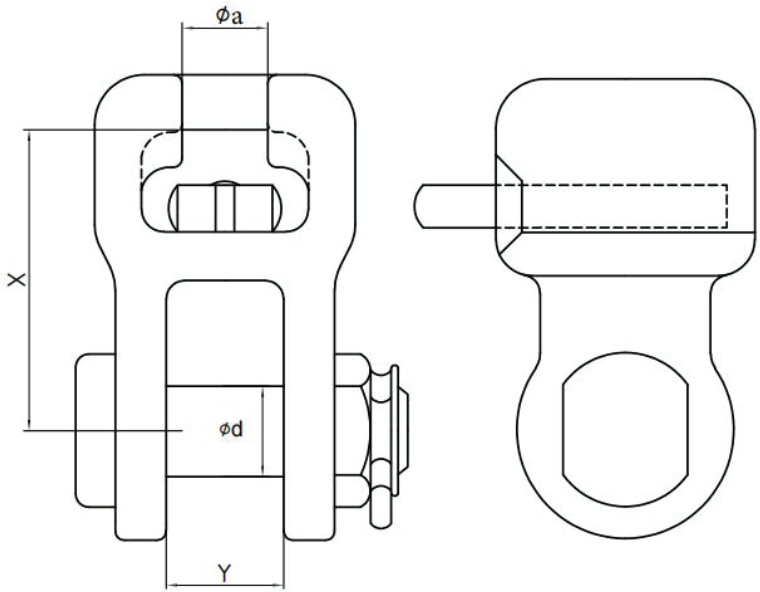

| Tip<br>Type | Dimenzije (mm)<br>Dimensions (mm) |    |    |      | Klasa IEC<br>IEC Class | Min. prekidna sila (kN)<br>Min. Breaking load (kN) | Masa (kg)<br>Mass (kg) |
|-------------|-----------------------------------|----|----|------|------------------------|----------------------------------------------------|------------------------|
|             | X                                 | Y  | Ød | Øa   |                        |                                                    |                        |
| ZV-16-101   | 65                                | 24 | 16 | 19.2 | 16                     | 120                                                | 0.95                   |
| ZV-20-101   | 108                               | 24 | 16 | 23   | 20                     | 120                                                | 1.63                   |