

CROATIAN
PRODUŽNIK RAVNI

Primjena: Za ovješanje dvostrukog nosivog izolatorskog lanca

Materijal: Čelik vruće pocinčan


Standard: Ispitano po standardu: EN ISO 1461, EN ISO 61284

ENGLISH
Extension Links

Application: Designed for suspending double load-bearing insulator chains

Material: Steel, hot-dip galvanized

Standard: Tested according to standards: EN ISO 1461, EN ISO 61284

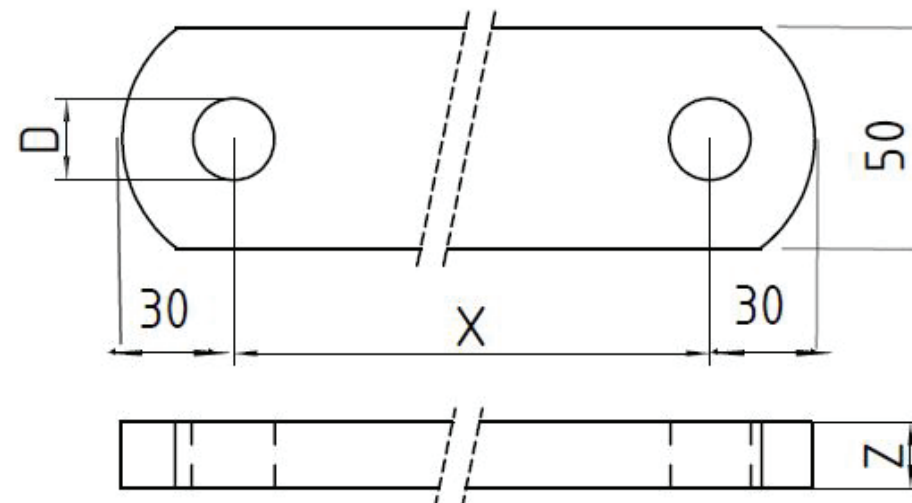


	Tip Type	Dimenzije (mm) Dimensions (mm)			Min. prekidna sila (kN) Min. Breaking load (kN)	Masa (kg) Mass (kg)
		X	Y	D		
	PR 100 120kN	100	12	17.5	120	0.69
	PR 300 160kN	300	22	21.5	160	2.90

CROATIAN
PRODUŽNIK ZAOKRENUTI ZA 90°

Primjena: Za ovješanje dvostrukog zateznog izolatorskog lanca

Materijal: Čelik vruće pocinčan

Standard: Ispitano po standardu: EN ISO 1461, EN ISO 61284

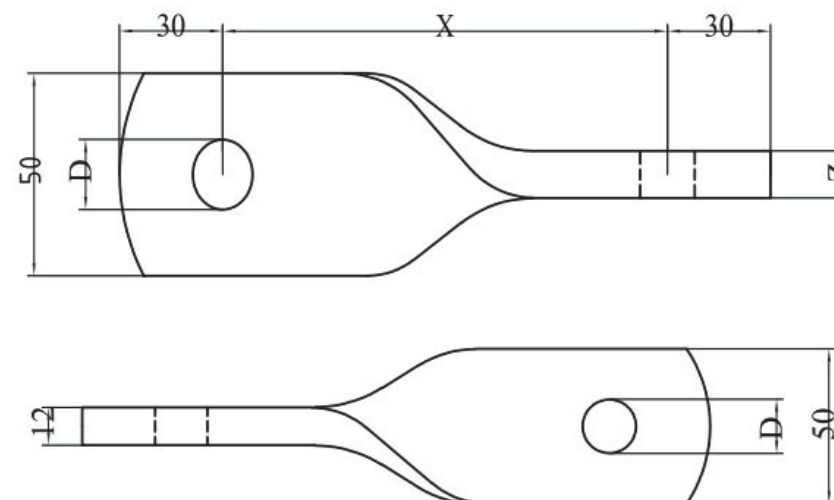
ENGLISH
Extension Link 90°

Application: Designed for hanging double tension insulator strings

Material: Steel, hot-dip galvanized

Standard: Tested according to standards: EN ISO 1461, EN ISO 61284



Tip Type	Dimenzije (mm)		Dimensions (mm)		Min. prekidna sila (kN)	Masa (kg)
	X	Y	D	D1	Min. Breaking load (kN)	Mass (kg)
PZ 9013070kN	130	12	17.5	17.5	70	0.85

CROATIAN

PRODUŽNIK KARIKA-OČKA

Primjena: Za ovješanje dvostrukog izolatorskog lanca

Materijal: Čelik vruće pocinčan

Standard: Ispitano po standardu: EN ISO 1461, EN ISO 61284


ENGLISH

Extension Links Eye-Tongue

Application: For suspending double insulator strings

Materijal: Hot-dip galvanized steel

Standard: Tested according to: EN ISO 1461, EN ISO 61284

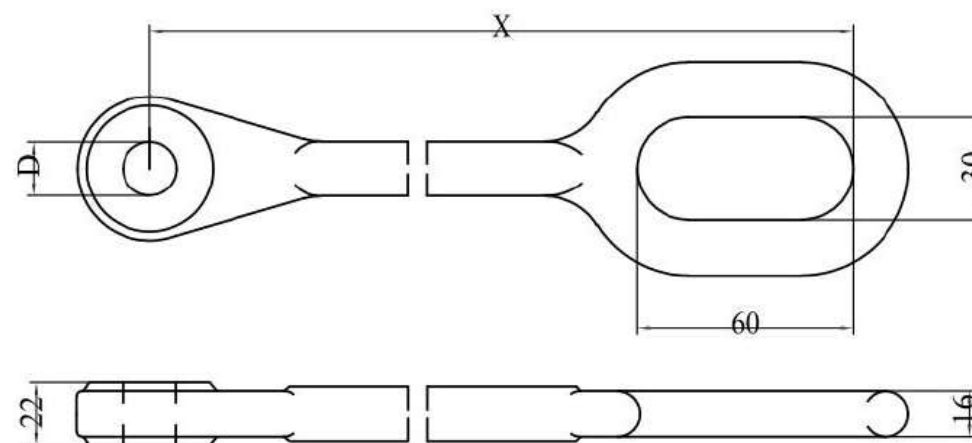

Tip Type	Dimenzije (mm) Dimensions (mm)		Min. prekidna sila (kN) Min. Breaking load (kN)	Masa (kg) Mass (kg)
	X	D		
PKO 200175120kN	200	17.5	120	0.80
PKO 200215120kN	200	21.5	120	0.80

CROATIAN

PRODUŽNIK VILICA-OČKA Vilica "U" oblika

Primjena: Za ovješnje dvostrukog nosivog izolatorskog lanca. Svornjak M16.

Tip: PVOU 200

Materijal: Čelik vruće pocinčan

Standard: Ispitano po standardu: EN ISO 1461, EN ISO 61284

ENGLISH


Extension Links Clevis-Tongue

Application: Designed for suspending double load-bearing insulator chains. Bolt M16.

Model: PVOU 200

Material: Hot-dip galvanized steel

Standard: Tested according to: EN ISO 1461, EN ISO 61284

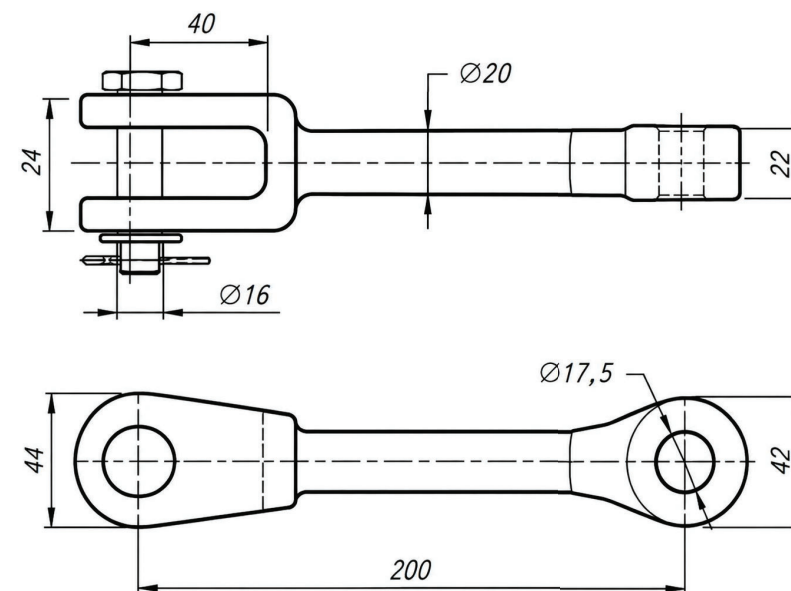

Tip Type	Dimenzije (mm) Dimensions (mm)			Min. prekidna sila (kN) Min. Breaking load (kN)	Masa (kg) Mass (kg)
	X	Y	D		
PVOU 200	24	200	17.5	120	0.90

CROATIAN



PRODUŽNIK VILICA-OČKA ZAOKRENUTA ZA 90°

- Primjena:** Za ovješnje dvostrukog izolatora
- Tip:** PVOU 90-200
- Materijal:** Čelik vruće pocinčan
- Standard:** Ispitano po standardu: EN ISO 1461, EN ISO 61284

ENGLISH

Extension Link Clevis-Tongues 90°

- Application:** Designed for suspending double insulators
- Model:** PVOU 90-200
- Material:** Hot-dip galvanized steel
- Standard:** Tested according to EN ISO 1461, EN ISO 61284

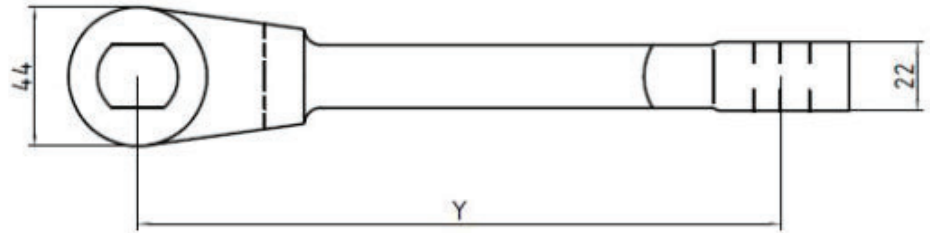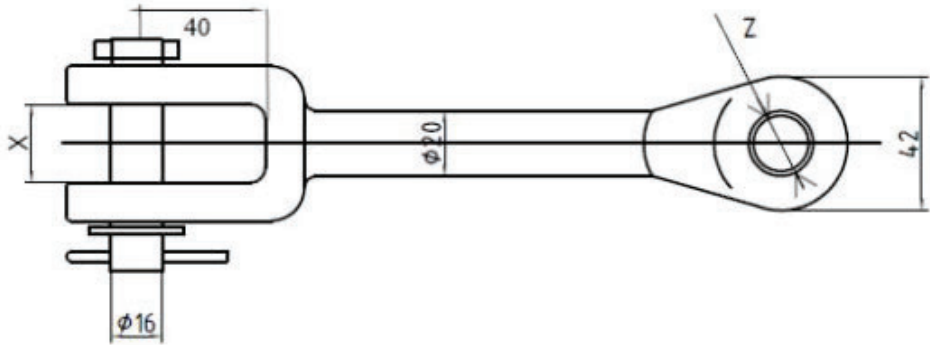

Tip Type	Dimenzije (mm) Dimensions (mm)			Min. prekidna sila (kN) Min. Breaking load (kN)	Masa (kg) Mass (kg)
	X	Y	Z		
PVOU 90-200	24	200	17.5	120	0.90

CROATIAN
PRODUŽNIK VILICA-OČKA Vilica "V" oblika

Primjena: Za ovješanje dvostrukog izolatorskog lanca

Tip: PVOV 80

Materijal: Čelik vruće pocinčan

Standard: Ispitano po standardu: EN ISO 1461, EN ISO 61284



ENGLISH
Extension Links Clevis-Tongues

Application: For suspending double insulator chains

Model: PVOV 80

Materijal: Hot-dip galvanized steel

Standard: Tested in accordance with: EN ISO 1461, EN ISO 61284

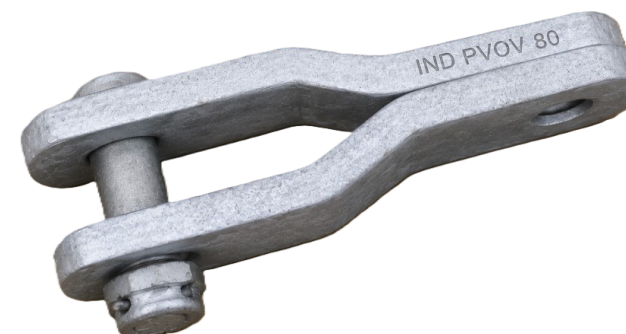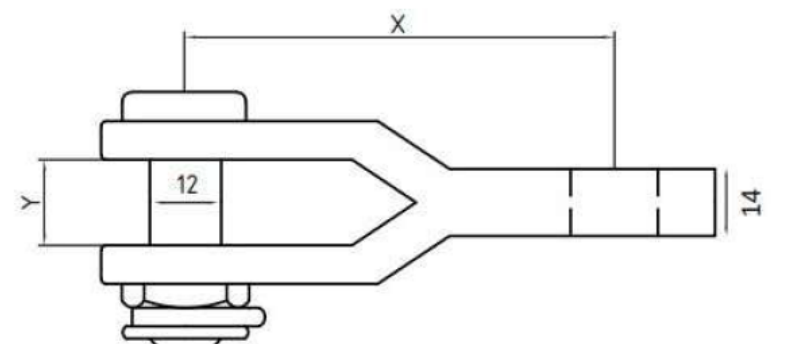

Tip Type	Dimenzije (mm) Dimensions (mm)			Min. prekidna sila (kN) Min. Breaking load (kN)	Masa (kg) Mass (kg)
	X	Y	Z		
PVOV 80	80	14	17.5	80	0.70