CROATIAN

OBUJMICA SKS; SA 4 KUKE

Obujmica SKS sa četri kuke ugrađuje se na stupove elektrodistributivnih mreža NN SKS-a kao spoj samog stupa i ostalih elemenata potrebnih za postavljanje i pravilnu upotrebu vodiča. Kuke se koriste za prihvat nosnih i zateznih stezaljki za ovješenje SKS-a kao i za prihvat stezaljki za kućne priključke. Obujmica je dostupna u raznim veličinama i pokriva sve promjere stupova.

TIP: OBUJMICA SKS

Materijal: Čelik: S 235JR
Vruće cinčanje po standardu IEC ISO 1461

Standard: EN 61284; NFC 33-041; IEC ISO 1461

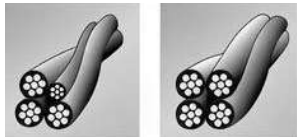

ENGLISH

SKS Clip; With 4 Hooks

The SKS clip with four hooks is installed on the poles of LV SKS power distribution networks as a connection between the pole itself and other elements required for the installation and proper use of the conductor. The hooks are used to hold nose and tension clamps for SKS suspension as well as for holding clamps for household connections. The clip is available in various sizes and covers all pole diameters.

Type: SKS CLIP

Material: Steel: S 235JR, Hot dip galvanizing as standard IEC ISO 1461

Standard: EN 61284; NFC 33-041; IEC ISO 1461

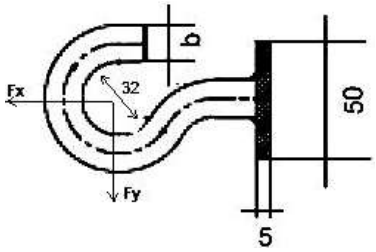

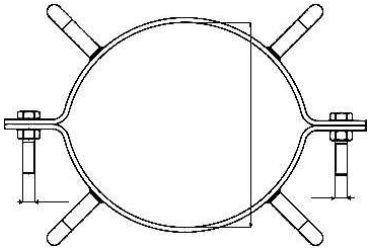

Tehnički Podaci | Specifications

	Tip	Type	d (mm)	Promjer kuke b (Ø mm) Hook diameter b (Ø mm)	Dopušteno opterećenje (kN) Permissible load (kN)		
					Fx	Fy	
	OBUJMICA SKS 12/120-140	SKS CLIP 12/120-140	120-140	12	3	1.6	
	OBUJMICA SKS 12/140-170	SKS CLIP 12/140-170	140-170	12	3	1.6	
	OBUJMICA SKS 12/170-210	SKS CLIP 12/170-210	170-210	12	3	1.6	
	OBUJMICA SKS 12/200-240	SKS CLIP 12/200-240	200-240	12	3	1.6	
	OBUJMICA SKS 12/240-280	SKS CLIP 12/240-280	240-280	12	3	1.6	
	OBUJMICA SKS 16/120-140	SKS CLIP 16/120-140	120-140	16	7.5	3.5	
	OBUJMICA SKS 16/140-170	SKS CLIP 16/140-170	140-170	16	7.5	3.5	
	OBUJMICA SKS 16/170-210	SKS CLIP 16/170-210	170-210	16	7.5	3.5	
	OBUJMICA SKS 16/200-240	SKS CLIP 16/200-240	200-240	16	7.5	3.5	
	OBUJMICA SKS 16/240-280	SKS CLIP 16/240-280	240-280	16	7.5	3.5	

CROATIAN

OBUJMICA SKS-V; SA 4 KUKE I DVA VIJKA M16

Obujmica SKS-V sa četri kuke i dva vijka M16 ugrađuje se na stupove elektrodistributivnih mreža NN SKS-a kao spoj samog stupa i ostalih elemenata potrebnih za postavljanje i pravilnu upotrebu vodiča. Kuke se koriste za prihvat nosnih i zateznih stezaljki za ovješenje SKS-a kao i za prihvat stezaljki za kućne priključke, a dodatna dva vijka M16 za montažu dodatnih elemenata za ovjes SKS-a.

TIP: OBUJMICA SKS-V

Materijal: Čelik vruće pocinčan

Standard: EN 61284; NFC 33-041; IEC ISO 1461

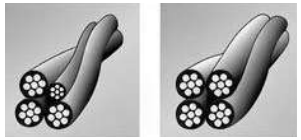

ENGLISH

ABC-V Clip; With 4 Hooks And Two Bolts M16

The ABC-V clip with four hooks and two M16 bolts is installed on the poles of LV ABC electricity distribution networks as a connection between the pole itself and other elements necessary for the installation and proper use of the conductor. The hooks are used to accept the nose and tension clamps for ABC suspension as well as for accepting clamps for house connections, and an additional two M16 screws for mounting additional elements for ABC suspension.

Type: ABC-V CLIP

Material: Steel hot-dip galvanized

Standard: EN 61284; NFC 33-041; IEC ISO 1461

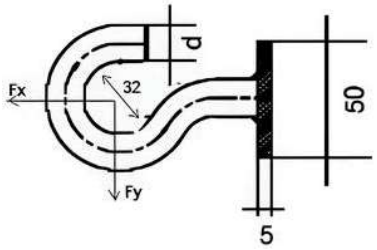



Tehnički Podaci | Specifications

	Tip	Type	d (mm)	Promjer kuke b (Ø mm) Hook diameter b (Ø mm)	Vijak imbus Allen bolt	Dopušteno opterećenje (kN) Permissible load (kN)		
						Fx	Fy	
	OBUJMICA SKS-V 12/120-140	ABC-V CLIP 12/120-140	120-140	12	M16x25	3	1.6	
	OBUJMICA SKS-V 12/140-170	ABC-V CLIP 12/140-170	140-170	12	M16x25	3	1.6	
	OBUJMICA SKS-V 12/170-210	ABC-V CLIP 12/170-210	170-210	12	M16x25	3	1.6	
	OBUJMICA SKS-V 12/200-240	ABC-V CLIP 12/200-240	200-240	12	M16x25	3	1.6	
	OBUJMICA SKS-V 12/240-280	ABC-V CLIP 12/240-280	240-280	12	M16x25	3	1.6	
	OBUJMICA SKS-V 16/120-140	ABC-V CLIP 16/120-140	120-140	16	M16x25	7.5	3.5	
	OBUJMICA SKS-V 16/140-170	ABC-V CLIP 16/140-170	140-170	16	M16x25	7.5	3.5	
	OBUJMICA SKS-V 16/170-210	ABC-V CLIP 16/170-210	170-210	16	M16x25	7.5	3.5	
	OBUJMICA SKS-V 16/200-240	ABC-V CLIP 16/200-240	200-240	16	M16x25	7.5	3.5	
	OBUJMICA SKS-V 16/240-280	ABC-V CLIP 16/240-280	240-280	16	M16x25	7.5	3.5	

CROATIAN

PROKROM TRAKA (BAND-IT TRAKA)

Prokrom trake od nehrđajućeg čelika koriste se za učvršćenje na stupu; mehaničke zaštite kabela, nosača za ovjesne i zatezne stezaljke kao i drugih elemenata spojne i ovjesne opreme NN SKS-a. Režu se na potrebnu dužinu sa većeg koluta. Trake se učvršćuju pomoću odgovarajućih kopči i alata za zatvaranje. Prilagođene za korištenje na terenu. Traka je dostupna u raznim dimenzijama i pakiranjima.

TIP: PT

Materijal: Nehrđajući čelik: klasa AISI 304, AISI 202

Standard: EN 61284

ENGLISH

Prochrome Band (Stainless Steel Band)

Prochrome stainless steel bands are used for fastening to poles; mechanical protection of cables, supports for suspension and tension clamps, as well as other elements of LV ABC connection and suspension equipment. They are cut to the required length from a larger roll. The bands are fastened using appropriate clips and closing tools. Adapted for use in the field. The band is available in various dimensions and packaging.

Type: PT

Material: Stainless steel: grade AISI 304, AISI 202

Standard: EN 61284

Tehnički Podaci | Specifications

Tip Type	Dimenzije (mm) Dimensions (mm)		Min. prekidna čvrstoća (kN/mm²) Min. breaking strength (kN/mm²)	Pakiranje (m) Packaging (m)
	debljina thickness	širina width		
PT 9.5x0.6	0.6	9.5	≥0.6	30.5
PT 10x0.4	0.4	10.0	≥0.6	50
PT 10x0.7	0.7	10.0	≥0.6	50

CROATIAN

Kopča za BAND-IT (prokrom) traku

Primjena:

Prokorom kopče od nehrđajućeg čelika koriste se prilikom stezanja BAND-IT prokrom trake, bez vijka, a koja se koristi pritezanjem određenim alatom.

TIP: ZPT 9.5 mm

Materijal: nehrđajući čelik (INOX) klasa AISI 304

Standard: 61284

Širina: 9.5 mm

ENGLISH

BAND-IT Stainless Steel Buckle

Application:

Stainless steel BAND-IT clips are used to secure BAND-IT stainless steel straps without screws, tightened with a specialized tool.

Type: VKSK

Material: Stainless steel (INOX), grade AISI 304

Standard: 61284

Width: 9.5 mm

CROATIAN

Kopča za BAND-IT (prokrom) traku

Primjena:

Prokrom kopče od nehrđajućeg čelika koriste se prilikom stezanja BAND-IT prokrom trake, bez vijka, a koja se koristi pritezanjem određenim alatom

TIP: ZPT 10 mm

Materijal: nehrđajući čelik (INOX) klasa AISI 202

Standard: EN 61284

Širina: 10 mm

ENGLISH

Buckle for stainless steel band (prochrome)

Application:

Stainless steel prochrome clips are used when clamping BAND-IT prochrome strap, without a screw, which is used by tightening with a specific tool.

Type: ZPT 10 mm

Material: stainless steel (INOX) grade AISI 202

Standard: EN 61284

Width: 10 mm

CROATIAN

OBUJMICA OBN

Materijal: Čelik DIN R St 37-2, DIN St 52-3, vruće pocinčan

Standard: EN ISO 1461, EN 61284

Min.prekidna sila: 80kN

ENGLISH

Clamp OBN

Material: Steel, DIN R St 37-2, DIN St 52-3,HDG

Standard: EN ISO 1461; EN 61284

Min.breaking force: 80 kN

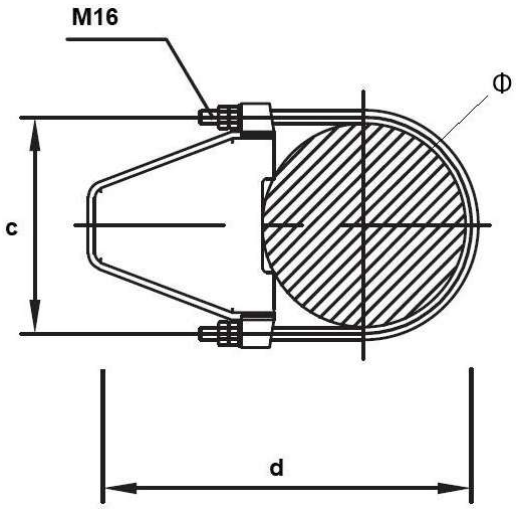

OBN-1

Tehnički Podaci | Specifications

	Kat. br Cat. No.	Vijak Screw	d (mm)	c (mm)	Ø	
	OBN-1	M16	350-470	270	210-260	

CROATIAN

OBUJMICA OBN

Materijal: Čelik DIN R St 37-2, DIN St 52-3, vruće pocinčan

Standard: EN ISO 1461, EN 61284

Min.prekidna sila: 80kN

ENGLISH

Clamp OBN

Material: Steel, DIN R St 37-2, DIN St 52-3,HDG

Standard: EN ISO 1461; EN 61284

Min.breaking force: 80 kN

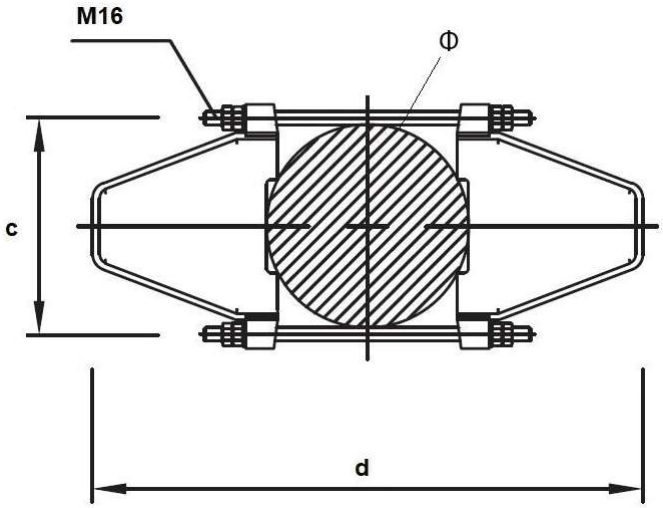

OBN-2

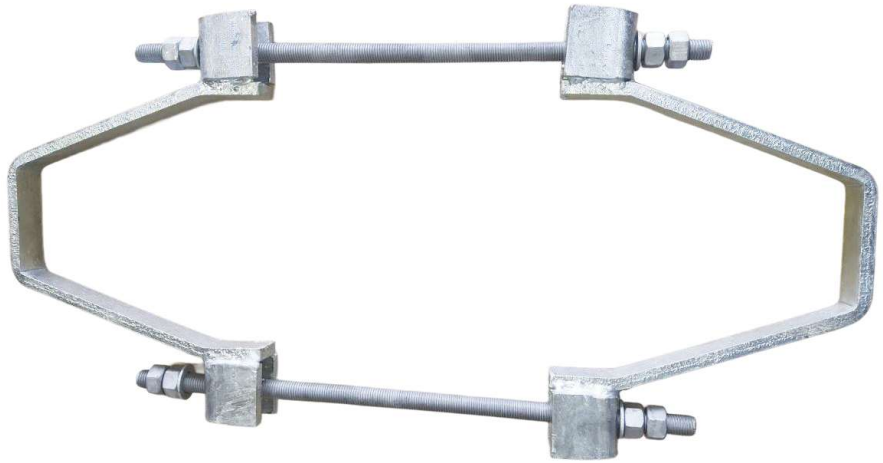

Tehnički Podaci | Specifications

	Kat. br Cat. No.	Vijak Screw	d (mm)	c (mm)	Ø	
	OBN-2	M16	550-675	270	210-260	

CROATIAN

OBUJMICA OBN

Materijal: Čelik DIN R St 37-2, DIN St 52-3, vruće pocinčan

Standard: EN ISO 1461, EN 61284

Min.prekidna sila: 80kN

ENGLISH

Clamp OBN

Material: Steel, DIN R St 37-2, DIN St 52-3,HDG

Standard: EN ISO 1461; EN 61284

Min.breaking force: 80 kN

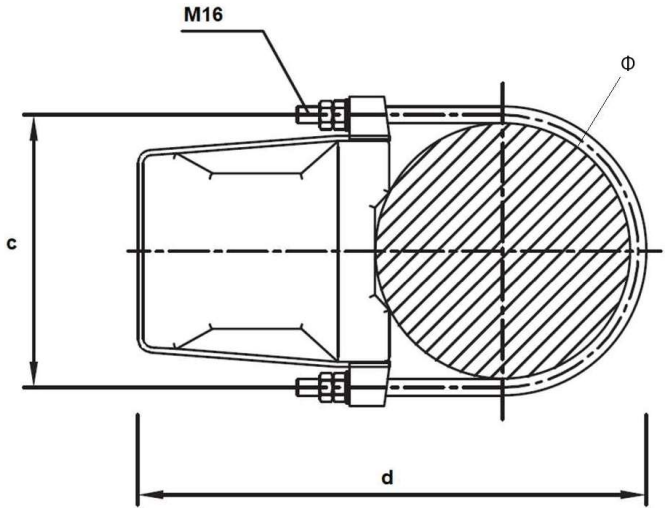

OBN-3

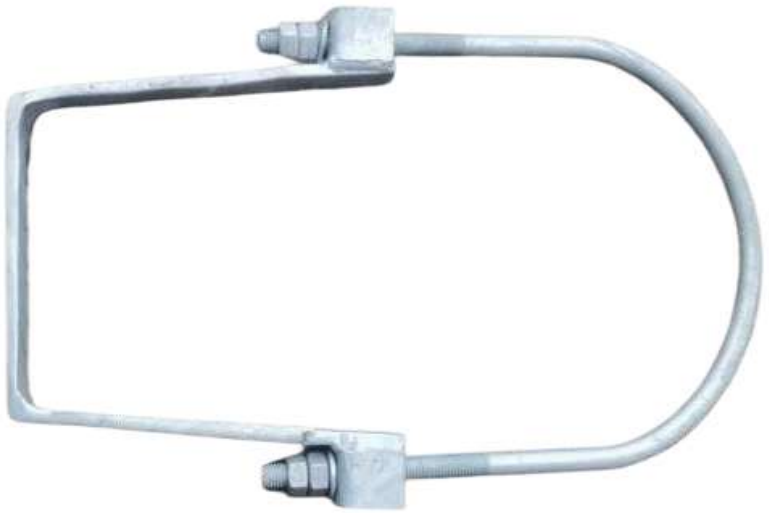

Tehnički Podaci | Specifications

	Kat. br Cat. No.	Vijak Screw	d (mm)	c (mm)	Ø	
	OBN-3	M16	340	280	210-260	